

MPA® Multi-Protocol Analyzer

Modular Test Platform 6-Slot



Ethernet/IP
OTN & SDH/SONET
Fibre Channel
Port rates from 1G to 400G



Simultaneous Independent Multi-Port Testing

Advanced packet optical transport traffic generation and analysis platform specifically designed for the demands of R&D, SVT, and manufacturing testing environments.

Platform Highlights

- Supports up to 6 pluggable test modules which can be configured independently and operated simultaneously
- Simultaneous and independent Multi-Port, Multi-Protocol, & Multi-User testing
- Compact 1U x 19" rack mounted chassis with low power and small size footprint for dense application environments
- Completely modular and fully customer-maintainable platform designed for 24x7 operation
- Intuitive remote GUI with simple, consistent setup and workflow across all test modules
- Comprehensive test automation and CLI scripting support
- Pay-As-You-Go platform allowing test modules to be easily added on-site and new capabilities to be downloaded
- Significantly reduces the amount of testing equipment, required footprint, and test time

Key Testing Applications

Ethernet/IP Traffic Generation & Analysis

- Full line rate layer 1-4 multi-stream, throughput, frame loss, latency, packet jitter, and BERT characterization
- PCS & RS-FEC layer testing
- RFC 2544 and Y.1564 compliance testing
- Service disruption time (SDT) measurement

OTN Traffic Generation & Analysis

- OTL and FEC layer testing
- Multi-Channel OTN testing with support for parallel testing of up to 80xODU0s
- Advanced multi-stage OTN multiplexing with Ethernet, GFP, Fibre Channel, SDH/SONET, & PRBS clients
- Complete overhead/trace generation and analysis with byte capture
- Thru mode with error & alarm stimulus testing
- Service disruption time and delay measurements

SONET/SDH Traffic Generation & Analysis


- Multi-Channel SONET/SDH testing with support for parallel testing up to 192 channels
- PRBS and GFP/Ethernet mapping clients
- Complete overhead/trace generation and analysis with byte capture
- Thru mode with error & alarm stimulus testing
- Pointer & APS sequence generation and analysis
- Service disruption time and delay measurements

Fibre Channel Traffic Generation & Analysis


- Full line rate throughput, frame loss, latency and BERT characterization
- FEC layer testing
- Fibre Channel switch login and performance verification with FLOGI/PLOGI
- Buffer-to-buffer credit and flow control analysis
- Service disruption time measurement

Transceiver & Physical Layer Testing

- CFP8, CFP4, QSFP28, QSFP+, SFP28, SFP+, SFP module verification
- Unframed BERT for signal integrity testing
- Transceiver and MDIO/I2C testing
- Transceiver module health check feature
- High speed lane clock stressing/analysis and optical power level verification

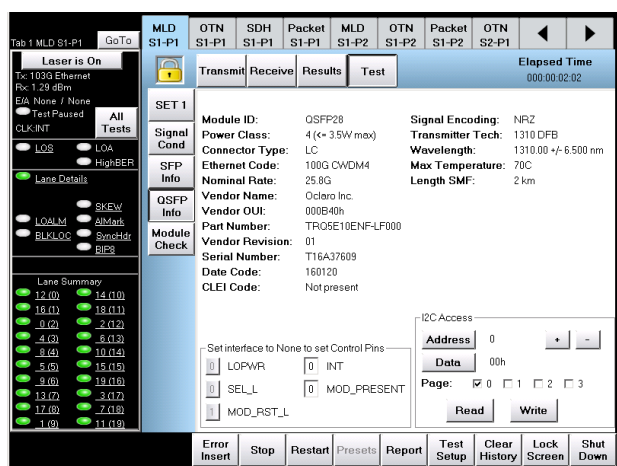

Transceiver MDIO/I2C Testing

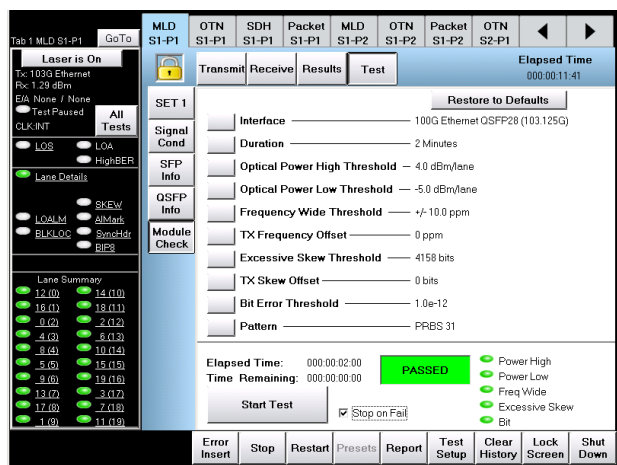

Module Health Check

Test Modules

Advanced and flexible FPGA based test modules provide future proof hardware support for emerging standards. Supports license based test options.

MPM-400G

- 400G Ethernet and FEC testing
- CFP8 port



MPM-100AR

- 40/100/100G RS-FEC Ethernet
- Dual port 10/25/25G RS-FEC Ethernet
- OTUCn (n=1-6), OTU4, OTU3, OTU3e1, & OTU3e2
- Dual port OTU2, OTU2e & OTU1e
- STL256.4 STM256/OC768
- Dual port 10/16/32G FEC Fibre Channel
- CPRI Unframed L1 BERT 24.33024G
- QSFP28 and dual SFP28 ports



MPM-100G

- 40/100/100G RS-FEC Ethernet
- OTUCn (n=1-6), OTU4, OTU3, OTU3e1, & OTU3e2
- STL256.4 STM256/OC768
- CFP4 and QSFP28 ports



MPM-10G

- 10GE LAN/WAN, 1G, 100M, 2500BASE-X, 10M/100M/1000M/10GBASE-T Ethernet
- OTU1, OTU2, OTU1e, OTU2e, OTU1f, OTU2f
- SDH STM0/1/4/16/64 & SONET OC1/3/12/48/192
- Fibre Channel 1/2/4/8/10G
- CPRI Unframed L1 BERT 614.4M to 12.16512G
- Dual SFP+ ports



General Specifications

Form Factor

- 1U x 19" x 7.68" (195mm) chassis with built-in rack mounts

Management

- Simultaneous multi-user environment managed with remote GUI, VNC, or SCPI CLI for test automation and scripting
- Local management via external USB keyboard/mouse and video monitor
- 1x USB 3.0, 1x USB 2.0, 1x micro USB 2.0
- Mini DisplayPort external video output
- 10/100/1000BASE-T LAN management port
- Pluggable controller module with Linux OS
- Visual display of LAN management address

Power

- Pluggable AC or -48VDC power supply options
- 600W (110-230VAC input) power supply with Self-Locking AC power cord, IEC-C13 with 2 meter (6ft) US, EU, or UK plug
- 420W-48VDC (-40 to -60V dual input) power supply with 7W2 D-Sub connectors, single 8ft 7W2 D-sub connector to unterminated input cable provided

Cooling

- Pluggable dual cooling modules with fan filter; side to side cooling
- Intelligent cooling modules automatically adjust fan speeds to the current system load and operating environment

Chassis Clock Synchronization

- Internal Stratum III
- External RJ48 100/120 Ohm input/output: 1.544Mbps & 2.048Mbps
- External SMA 50 Ohm input: 1.544MHz, 2.048MHz, & 10MHz
- External SMA 50 Ohm output: 1.544MHz, 2.048MHz, & 10MHz
- Test modules support independent recovered and external clock options

Weight

- Typical weight with system modules: 4.0kg (8.8lbs)*
- Typical weight with system modules and 6 test modules: 5.1kg (11.2lbs)*

Operating Temperature

- 5°C to 40°C (41°F to 104°F)

Storage Temperature


- -20°C to 70°C (-4°F to 158°F)

Humidity

- 5% to 95% non-condensing

ROHS compliant and Lead Free per Directive 2002/95/EC

*Weight will vary depending on configuration

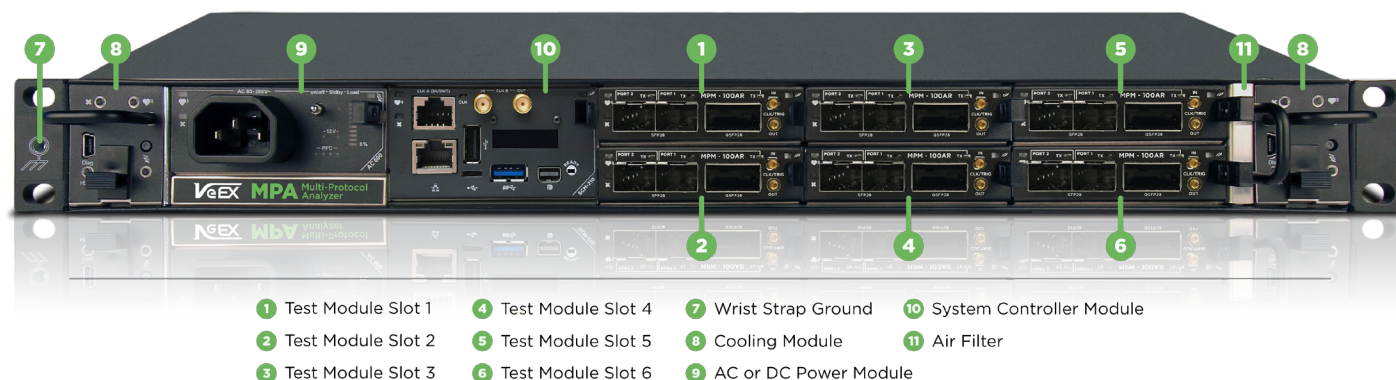

For more information



dhs ELMEA tools GmbH

Carl-Zeiss-Straße 43
63322 Rödermark / Germany
fon +49 6074 / 91 99 08-0
fax +49 6074 / 91 96 747
web www.dhs-tools.de
mail info@dhs-tools.de

© 2018 VeEX Inc. All rights reserved.

VeEX is a registered trademark of VeEX Inc. The information contained in this document is accurate. However, we reserve the right to change any contents at any time without notice. We accept no responsibility for any errors or omissions. In case of discrepancy, the web version takes precedence over any printed literature.

D05-00-154P A00 2018/08