



"Results You Can Count On"

Model 800-8-212-TP100-25
Gfast 8-Channel Loop Simulator
Repeatable Production Testing Solution

Ideal for testing Gfast Profile 106 and Profile 212.



Model 800-8-212-TP100-25 (8 Channels, 25m, Fixed Length)

Introducing the world's first commercially available Production Gfast Loop Simulator.

Telebyte's Model 800-8-212-TP100 is the world's first commercially available Production Gfast simulator. This 8-channel product utilizes a passive design that features a very low noise floor, providing realistic, repeatable test results. Users can extend line lengths by jumpering from channel-to-channel and/or unit-to-unit.

Features Include:

- Simulation of TP100 as defined by BBF WT-285 issue 2 (Attenuation, Impedance, Group Delay)
- Bandwidth DC to 240 MHz
- 8 independent channels (25m, fixed length, twisted pair)
- 65dB isolation between channels for 8 independent loops
- Passive design provides very low noise floor of < -160 dBm/Hz
- Reliable and repeatable test results
- Supports testing of Reverse Power Feeding
- 1U rack-mountable standalone chassis
- Modular design allows for expansion to build dense configurations
- Extend length by cascading from channel-to-channel or through unit-to-unit jumpering
- Automate variable loop lengths by integrating with Telebyte's 600 Series Switch Modules
- Ideal for many applications including production testing, aftermarket services and bonding



"Results You Can Count On"

Model 800-8-212-TP100-25
Gfast 8-Channel Local Loop Simulator
Continued

Specifications

Series Specifications	
Simulation	- Simulates TP100 as defined in Broadband Forum's WT-285, Issue 2, Revision 5, Annex E, June 2018 - Simulates attenuation, impedance, group delay.
Bandwidth	DC to 240 MHz
Average Noise Floor	< -160 dBm/Hz
Attenuation (Insertion Loss)	MAE < 0.5dB (2MHz to 212MHz) Maximum Attenuation up to 90dB
Impedance	Complex, varies over frequency with length
Group Delay	Better than 5%
DC Rating	± 60 V between Tip and Ring and 350mA
Dimensions	[1U] W 19 in x H 1.75 in x D 24 in (W 482 mm x H 44 mm x D 609 mm)
Mounting options	Mountable in 19" rack
Connectors	16 RJ45 female on front (1 in, 1 out per channel)

Specifications are subject to change without notice. Made in USA.

Ordering Options

Model	Description
800-8-212-TP100-25	Gfast 8-Channel 25m Fixed Length Loop Local Simulator

*Brought to you by the worldwide leader
in Gfast Physical Layer Testing Solutions.*






Model 800-8-212-TP100-25
Gfast 8-Channel Local Loop Simulator
Continued

"Results You Can Count On"

Examples

Gfast Production Testing
24 Channels, 25m each

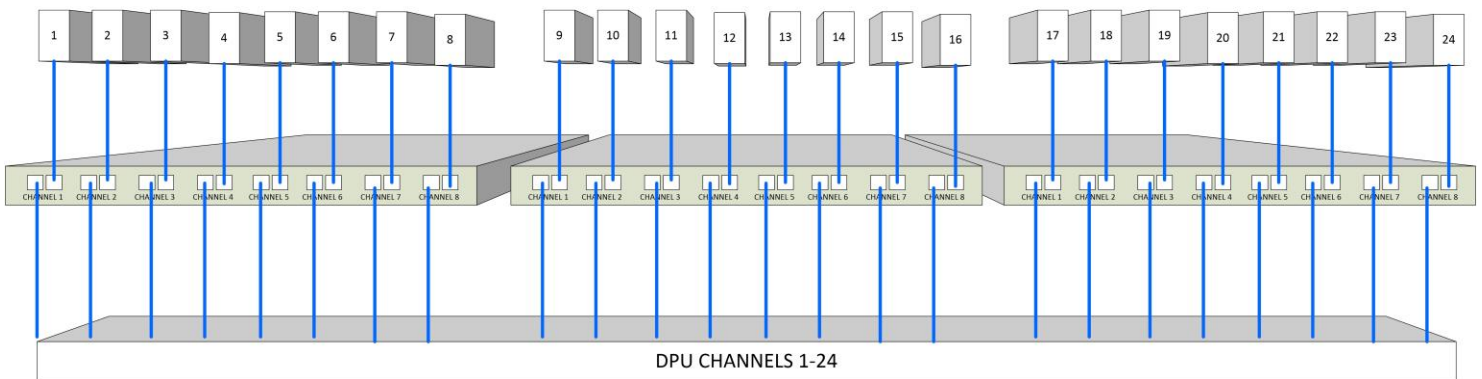

BONDING TWO 100-METER LINES

